


5.7M 붐 & 2.9M 암 & 0.92^{m³}버킷

DX220LC

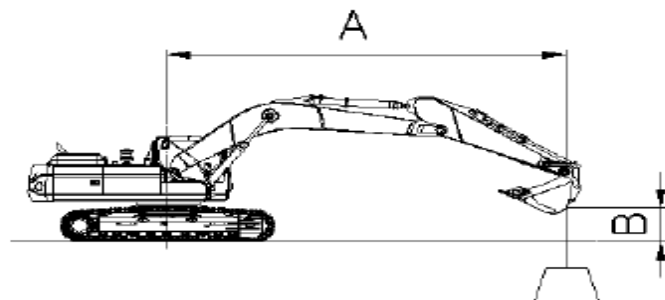

TRACK WIDTH : 2.99m (9' 10") STD TRACK

BOOM : 5.7m (18' 8")

ARM : 2.9m (9' 6")

BUCKET : SAE 0.92^{m³} HEAPED
(CECE 0.8^{m³})

SHOE : 600mm (24")

COUNTER WEIGHT : 4100 kg (9039 lb)

UNIT : 1000 kg (1000 lb)

: RATING OVER FRONT




: RATING OVER SIDE OR 360 degree

METRIC

A(m) B(m)	2		3		4		5		6	
8										
7										
6									*4.53	*4.53
5									*4.87	*4.87
4							*5.95	*5.95	*5.37	4.79
3			*11.94	*11.94	*8.57	*8.57	*6.92	6.19	*5.97	4.64
2			*7.08	*7.08	*10.19	8.36	*7.89	5.93	*6.58	4.49
1			*5.62	*5.62	*11.36	8.03	*8.69	5.73	*7.11	4.36
0(GROUND)	*3.08	*3.08	*6.66	*6.66	*11.94	7.85	*9.21	5.59	7.05	4.26
1	*5.53	*5.53	*8.59	*8.59	*12.03	7.77	9.40	5.51	6.98	4.19
2	*7.92	*7.92	*11.11	*11.11	*11.71	7.77	*9.28	5.48	6.96	4.17
3	*10.58	*10.58	*14.12	12.89	*10.99	7.82	*8.81	5.51	6.98	4.19
4	*13.78	*13.78	*12.36	*12.36	*9.77	7.94	*7.86	5.59	*6.29	4.26
5			*9.77	*9.77	*7.80	*7.80	*6.10	5.75		
6										


5.7M 붐 & 2.9M 암 & 0.92m³ 버킷

DX220LC

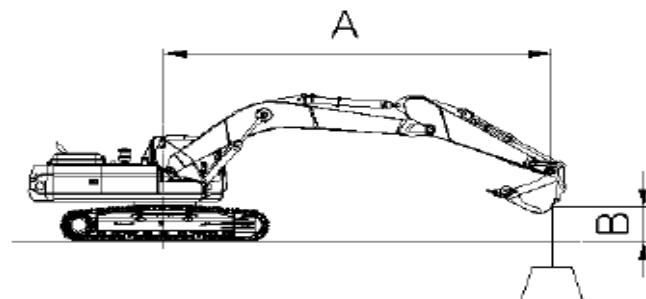

TRACK WIDTH : 2.99m (9' 10") STD TRACK
 BOOM : 5.7m (18' 8")
 ARM : 2.9m (9' 6")
 BUCKET : SAE 0.92m³ HEAPED
 (CECE 0.8m³)

SHOE : 600mm (24")
 COUNTER WEIGHT : 4100 kg (9039 lb)
 UNIT : 1000 kg (1000 lb)
 : RATING OVER FRONT




: RATING OVER SIDE OR 360 degree

METRIC

A(m) B(m)	7		8		MAX. REACH		A(m)
8					*3.42	*3.42	@5.94
7					*3.31	*3.31	@6.85
6	*4.39	3.84			*3.30	*3.30	@7.51
5	*4.69	3.79			*3.36	2.99	@7.99
4	*4.99	3.72	*4.50	2.95	*3.48	2.75	@8.32
3	*5.36	3.62	4.67	2.90	*3.65	2.59	@8.52
2	5.71	3.53	4.61	2.84	*3.89	2.51	@8.60
1	5.61	3.44	4.55	2.79	4.09	2.50	@8.56
0(GROUND)	5.54	3.37	4.51	2.75	4.18	2.54	@8.40
1	5.49	3.33	4.48	2.73	4.39	2.67	@8.11
2	5.48	3.32			4.76	2.90	@7.69
3	5.51	3.35			5.41	3.29	@7.09
4					*5.86	4.00	@6.28
5					*5.85	5.50	@5.15
6							

5.7M 붐 & 3.5M 암 & 0.81^{m³}버킷

DX220LC

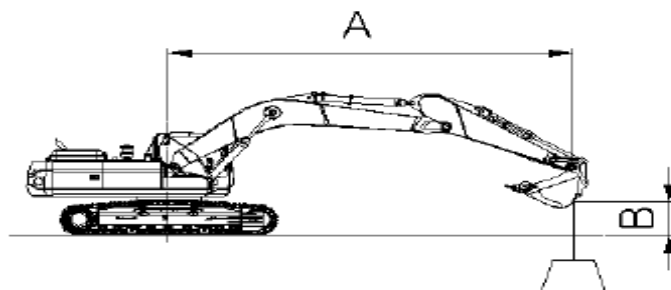


TRACK WIDTH : 2.99m (9' 10") STD TRACK
 BOOM : 5.7m (18' 8")
 ARM : 3.5m (11' 6")
 BUCKET : SAE 0.81^{m³} HEAPED
 (CECE 0.7^{m³})

SHOE : 600mm (24")
 COUNTER WEIGHT : 4100 kg (9039 lb)
 UNIT : 1000 kg (1000 lb)











: RATING OVER FRONT




: RATING OVER SIDE OR 360 degree

METRIC

A(m) \ B(m)	2		3		4		5	
								
8								
7								
6								
5								
4								
3			*9.80	*9.80	*7.45	*7.45	*6.21	*6.21
2			*13.13	*13.13	*9.20	8.53	*7.26	6.02
1			*8.04	*8.04	*10.63	8.12	*8.19	5.77
0(GROUND)	*3.76	*3.76	*7.64	*7.64	*11.54	7.85	*8.87	5.59
1	*5.45	*5.45	*8.73	*8.73	*11.93	7.71	*9.25	5.47
2	*7.33	*7.33	*10.55	*10.55	*11.87	7.66	9.30	5.41
3	*9.47	*9.47	*13.01	12.64	*11.41	7.68	*9.06	5.41
4	*12.02	*12.02	*13.59	12.79	*10.51	7.76	*8.40	5.46
5	*15.24	*15.24	*11.49	*11.49	*9.01	7.91	*7.19	5.57
6			*8.30	*8.30	*6.51	*6.51		

5.7M 붐 & 3.5M 암 & 0.81^{m³}버킷

DX220LC

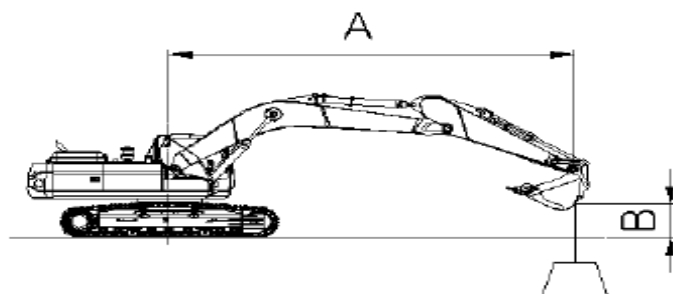

TRACK WIDTH : 2.99m (9' 10") STD TRACK
 BOOM : 5.7m (18' 8")
 ARM : 3.5m (11' 6")
 BUCKET : SAE 0.81^{m³} HEAPED
 (CECE 0.7^{m³})

SHOE : 600mm (24")
 COUNTER WEIGHT : 4100 kg (9039 lb)
 UNIT : 1000 kg (1000 lb)



: RATING OVER FRONT



: RATING OVER SIDE OR 360 degree

METRIC

A(m) B(m)	6		7		8		9		MAX. REACH		
											A(m)
8									*2.97	*2.97	@6.61
7			*3.54	*3.54					*2.89	*2.89	@7.43
6			*4.04	3.92	*2.98	*2.98			*2.89	*2.89	@8.04
5			*4.24	3.86	*3.87	3.05			*2.94	2.72	@8.49
4	*4.83	*4.83	*4.57	3.77	*4.39	2.99			*3.03	2.51	@8.81
3	*5.46	4.71	*4.97	3.67	*4.64	2.93			*3.18	2.38	@9.00
2	*6.13	4.54	*5.41	3.56	4.63	2.86	*3.62	2.33	*3.38	2.30	@9.07
1	*6.74	4.38	5.63	3.45	4.55	2.79	3.77	2.29	*3.65	2.28	@9.03
0(GROUND)	7.05	4.25	5.53	3.36	4.49	2.73			3.82	2.31	@8.88
1	6.95	4.16	5.46	3.30	4.45	2.69			3.98	2.41	@8.61
2	6.90	4.12	5.43	3.27	4.44	2.68			4.27	2.58	@8.21
3	6.90	4.11	5.43	3.28					4.75	2.88	@7.66
4	*6.83	4.15							5.59	3.39	@6.91
5									*5.77	4.36	@5.91
6									*5.75	*5.75	@4.46