


6.245M HD뽁 & 3.1M HD암

DX300LC-3



TRACK WIDTH : 3.2m (10' 6") STD TRACK
 BOOM : 6.245m (20' 6")
 ARM : 3.1m (10' 2")
 BUCKET : Without Bucket
 SHOE : 600mm (24")
 COUNTER WEIGHT : 5,300 kg (11,680 lb)
 UNIT : 1,000 kg (1,000 lb)
 : RATING OVER FRONT

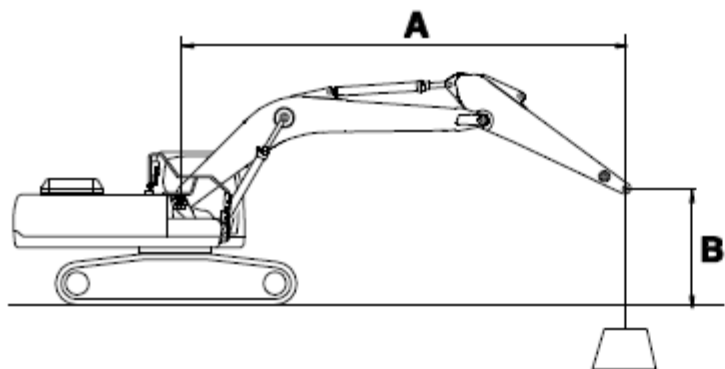


: RATING OVER SIDE OR 360 degree

METRIC


A(m) \ B(m)	1.5		3.0		4.5		6.0		7.5	
7.5										
6.0							* 6.88	* 6.88	* 6.80	5.75
4.5					* 9.57	* 9.57	* 8.01	7.94	* 7.28	5.60
3.0					* 12.67	11.44	* 9.49	7.49	* 8.04	5.38
1.5					* 15.24	10.65	* 10.91	7.08	8.31	5.16
0 (GND)					* 16.49	10.28	11.41	6.82	8.13	5.00
-1.5	* 8.59	* 8.59	* 12.25	* 12.25	* 16.64	10.19	11.27	6.70	8.05	4.93
-3.0	* 13.98	* 13.98	* 18.94	* 18.94	* 15.88	10.28	11.31	6.73	8.12	4.99
-4.5			* 19.28	* 19.28	* 13.89	10.56	* 10.23	6.95		

6.245M HD뿔 & 3.1M HD암

DX300LC-3

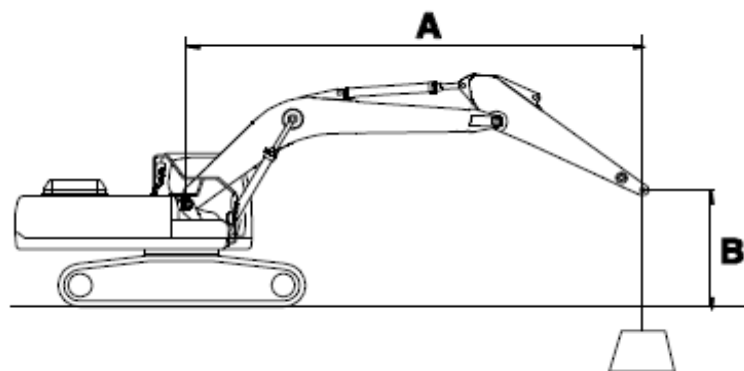

TRACK WIDTH : 3.2m (10' 6") STD TRACK
 BOOM : 6.245m (20' 6")
 ARM : 3.1m (10' 2")
 BUCKET : Without Bucket
 SHOE : 600mm (24")
 COUNTER WEIGHT : 5,300 kg (11,680 lb)
 UNIT : 1,000 kg (1,000 lb)
 : RATING OVER FRONT




: RATING OVER SIDE OR 360 degree

METRIC

A(m) \ B(m)	9.0		MAX. REACH		A(m)
7.5			* 5.41	* 5.41	7.27
6.0			* 5.20	4.92	8.19
4.5			* 5.22	4.31	8.77
3.0	* 5.96	4.04	* 5.41	3.99	9.07
1.5	6.30	3.94	* 5.79	3.87	9.10
0 (GND)			6.34	3.94	8.89
-1.5			6.85	4.24	8.40
-3.0			7.99	4.92	7.59
-4.5			* 9.46	6.49	6.32

6.245M HD북 & 2.85M HD암

DX300LC-3

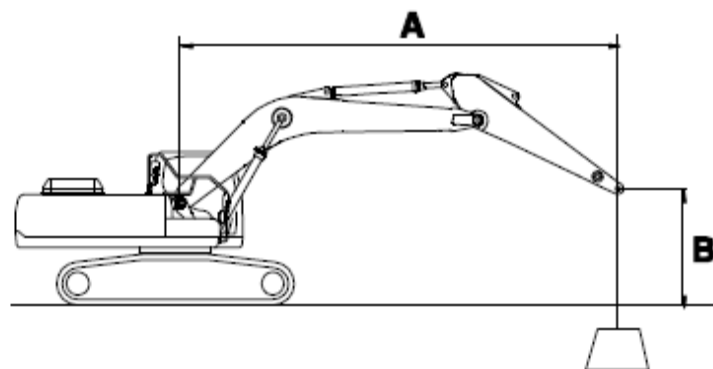

TRACK WIDTH : 3.2m (10' 6") STD TRACK
 BOOM : 6.245m (20' 6")
 ARM : 2.85m (9' 4")
 BUCKET : Without Bucket
 SHOE : 600mm (24")
 COUNTER WEIGHT : 5,300 kg (11,680 lb)
 UNIT : 1,000 kg (1,000 lb)
 : RATING OVER FRONT




: RATING OVER SIDE OR 360 degree

METRIC

A(m) \ B(m)	3.0		4.5		6.0		7.5		MAX. REACH		
											A(m)
7.5									* 7.05	6.64	6.87
6.0					* 7.20	* 7.20	* 7.08	5.69	* 7.05	5.25	7.85
4.5			* 10.09	* 10.09	* 8.31	7.86	* 7.51	5.55	* 7.14	4.55	8.45
3.0			* 13.18	11.28	* 9.76	7.42	* 8.23	5.34	6.66	4.19	8.76
1.5			* 15.59	10.54	* 11.11	7.03	8.27	5.13	6.51	4.06	8.80
0 (GND)			* 16.60	10.24	11.37	6.79	8.11	4.98	6.68	4.14	8.57
-1.5	* 13.06	* 13.06	* 16.56	10.20	11.27	6.70	8.05	4.93	7.27	4.48	8.07
-3.0	* 21.22	20.91	* 15.62	10.32	11.34	6.75			8.61	5.28	7.21
-4.5	* 18.33	* 18.33	* 13.36	10.63					* 9.97	7.24	5.87

10.0M 붐 & 7.0M 암

DX300LC-3

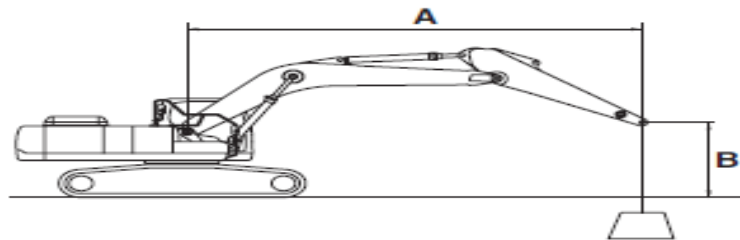













- 트랙 폭 : 3.2 m 표준 트랙
- 붐 : 10.0 m
- 암 : 7.0 m
- 버켓 : 장착 안함
- 카운터웨이트 : 5,900 kg
- 슈 : 800 mm
- 단위 : 전방 자세
- 단위 : 측방 또는 360 선회 자세
- 단위 : 1,000 kg (1,000 lb)

FG027223

그림 10

METRIC











A (m) \ B (m)	1.5		3		4.5		6		7.5		9	
												
12												
10.5												
9												
7.5												
6												
4.5												
3					* 9.36	* 9.36	* 6.56	* 6.56	* 5.20	* 5.20	* 4.41	4.38
1.5					* 6.44	* 6.44	* 7.93	6.83	* 6.07	5.13	* 5.00	4.00
0			* 3.28	* 3.28	* 5.76	* 5.76	* 8.99	6.16	* 6.82	4.67	* 5.53	3.68
-1.5	* 3.85	* 3.85	* 4.35	* 4.35	* 6.22	* 6.22	* 9.69	5.76	* 7.39	4.34	5.94	3.43
-3	* 4.82	* 4.82	* 5.43	* 5.43	* 7.09	* 7.09	* 10.08	5.57	7.41	4.15	5.75	3.27
-4.5	* 5.85	* 5.85	* 6.58	* 6.58	* 8.22	* 8.22	* 10.22	5.51	7.31	4.05	5.65	3.17
-6	* 6.93	* 6.93	* 7.81	* 7.81	* 9.58	8.60	* 10.14	5.55	7.30	4.04	5.63	3.15
-7.5	* 8.11	* 8.11	* 9.19	* 9.19	* 11.21	8.84	* 9.83	5.67	7.38	4.11	5.67	3.19
-9	* 9.41	* 9.41	* 10.78	* 10.78	* 11.98	9.18	* 9.25	5.88	* 7.46	4.25	5.79	3.30
-10.5			* 12.68	* 12.68	* 10.60	9.64	* 8.29	6.19	* 6.72	4.49	* 5.52	3.51
-12					* 8.48	* 8.48	* 6.70	6.65	* 5.34	4.87		

10.0M 북 & 7.0M 암

DX300LC-3

METRIC

1,000 kg

A (m) B (m)	10.5		12		13.5		15		MAX. REACH		
											A (m)
12									* 1.47	* 1.47	12.85
10.5					* 1.88	* 1.88			* 1.41	* 1.41	13.90
9					* 2.58	* 2.58			* 1.38	* 1.38	14.71
7.5			* 2.81	* 2.81	* 2.81	2.57	* 1.84	* 1.84	* 1.37	* 1.37	15.34
6			* 3.02	* 3.02	* 2.95	2.48	* 2.42	1.98	* 1.38	* 1.38	15.80
4.5	* 3.50	* 3.50	* 3.28	2.95	* 3.12	2.37	* 2.84	1.91	* 1.41	* 1.41	16.10
3	* 3.91	3.46	* 3.56	2.77	* 3.33	2.25	3.10	1.83	* 1.46	* 1.46	16.26
1.5	* 4.32	3.20	* 3.86	2.60	* 3.55	2.13	3.01	1.75	* 1.52	1.47	16.28
0	* 4.71	2.97	4.12	2.43	3.46	2.01	2.93	1.67	* 1.62	1.45	16.16
-1.5	4.80	2.79	3.98	2.30	3.36	1.92	2.87	1.61	* 1.74	1.46	15.90
-3	4.66	2.66	3.87	2.20	3.28	1.85	2.83	1.57	* 1.91	1.50	15.49
-4.5	4.58	2.58	3.81	2.14	3.25	1.82			* 2.14	1.58	14.91
-6	4.55	2.56	3.80	2.13	3.26	1.83			* 2.47	1.72	14.15
-7.5	4.59	2.59	3.85	2.18					* 2.97	1.95	13.18
-9	4.70	2.69							* 3.83	2.31	11.94
-10.5									* 4.56	2.96	10.33
-12									* 4.78	4.38	8.16

6.245M HD붐 & 3.1M HD암

DX300LC-5(-5K/-5L)

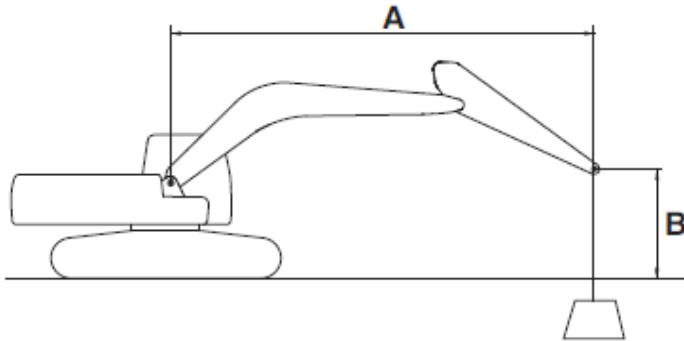


그림 19

트랙 폭 : 3.2 m 표준 트랙
 붐 : 6.245 m HD
 암 : 3.1 m
 버킷 : 1.27
 카운터웨이트 : 5,300 kg
 슈 : 600 mm
 : 전방 자세
 : 측방 또는 360 선회 자세
 단위 : 1,000 kg (1,000 lb)

EX1503232

METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		7.5		9		MAX. REACH		
															A (m)
7.5													* 5.05	* 5.05	7.27
6							* 6.33	* 6.33	* 6.23	6.12			* 4.85	* 4.85	8.19
4.5					* 8.83	* 8.83	* 7.36	* 7.36	* 6.67	5.95			* 4.86	4.58	8.77
3					* 11.66	* 11.66	* 8.71	7.97	* 7.36	5.72	* 5.56	4.29	* 5.04	4.24	9.07
1.5					* 14.02	11.32	* 10.01	7.53	* 8.09	5.48	* 6.33	4.19	* 5.40	4.11	9.10
0					* 15.16	10.93	* 10.91	7.25	8.63	5.31			* 6.03	4.19	8.89
-1.5	* 8.20	* 8.20	* 11.66	* 11.66	* 15.30	10.84	* 11.26	7.12	8.55	5.24			* 7.10	4.51	8.40
-3	* 13.30	* 13.30	* 17.99	* 17.99	* 14.59	10.94	* 10.92	7.16	* 8.36	5.30			* 8.20	5.23	7.59
-4.5			* 17.69	* 17.69	* 12.74	11.23	* 9.36	7.39					* 8.65	6.90	6.32

6.245M HD붐 & 2.85M HD암

DX300LC-5(-5K/-5L)

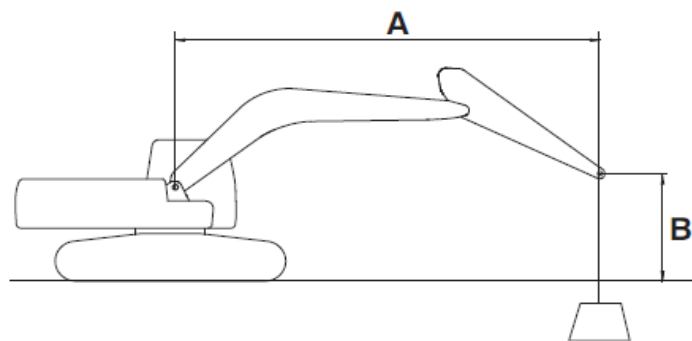


그림 18

트랙 폭 : 3.2 m 표준 트랙
 붐 : 6.245 m HD
 암 : 2.85 m
 버켓 : 1.27
 카운터웨이트 : 5,300 kg
 슈 : 600 mm
 : 전방 자세
 : 측방 또는 360 선회 자세
 단위 : 1,000 kg (1,000 lb)

EX1503231


METRIC



1,000 kg

A (m) \ B (m)	3		4.5		6		7.5		MAX. REACH		A (m)
7.5									* 6.51	* 6.51	6.87
6					* 6.66	* 6.66	* 6.52	5.92	* 6.58	5.46	7.85
4.5			* 9.34	* 9.34	* 7.67	* 7.67	* 6.91	5.77	* 6.70	4.73	8.45
3			* 12.17	11.72	* 9.00	7.71	* 7.57	5.55	6.89	4.35	8.76
1.5			* 14.38	10.94	* 10.23	7.30	* 8.25	5.33	6.73	4.22	8.80
0			* 15.31	10.62	* 11.05	7.04	8.39	5.17	6.91	4.30	8.57
-1.5	* 12.40	* 12.40	* 15.27	10.57	* 11.30	6.95	8.33	5.12	7.51	4.65	8.07
-3	* 20.12	* 20.12	* 14.39	10.71	* 10.81	7.01			* 8.65	5.48	7.21
-4.5	* 16.84	* 16.84	* 12.28	11.04					* 9.15	7.52	5.87

10.0M 붐 & 7.0M 암 & 800mm Shoe

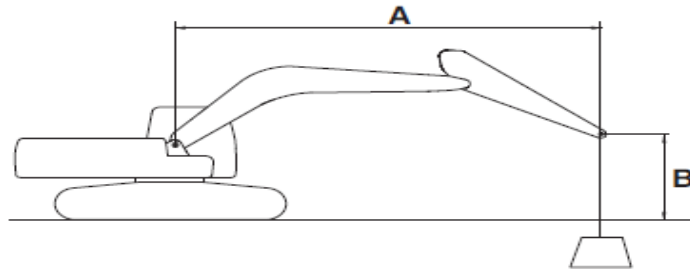DX300LC-5(-5K/-5L)















트랙 폭 : 3.2 m 표준 트랙
 붐 : 10 m
 암 : 7 m
 버켓 : 장착 안함
 카운터웨이트 : 6,300 kg
 슈 : 800 mm
 : 전방 자세
 : 측방 또는 360 선회 자세
 단위 : 1,000 kg (1,000 lb)

EX1503229

그림 16

METRIC

1,000 kg











A (m) \ B (m)	1.5		3		4.5		6		7.5		9	
												
12												
10.5												
9												
7.5												
6												
4.5											* 3.79	* 3.79
3					* 9.29	* 9.29	* 6.51	* 6.51	* 5.16	* 5.16	* 4.37	* 4.37
1.5					* 6.47	* 6.47	* 7.87	7.19	* 6.02	5.4	* 4.95	4.22
0			* 3.30	* 3.30	* 5.78	* 5.78	* 8.93	6.51	* 6.76	4.93	* 5.48	3.89
-1.5	* 3.87	* 3.87	* 4.37	* 4.37	* 6.23	* 6.23	* 9.62	6.11	* 7.34	4.60	* 5.93	3.64
-3	* 4.84	* 4.84	* 5.45	* 5.45	* 7.11	* 7.11	* 10.01	5.92	* 7.72	4.40	6.03	3.47
-4.5	* 5.86	* 5.86	* 6.59	* 6.59	* 8.23	* 8.23	* 10.15	5.86	7.66	4.31	5.93	3.38
-6	* 6.95	* 6.95	* 7.83	* 7.83	* 9.59	9.13	* 10.07	5.90	7.65	4.30	5.90	3.35
-7.5	* 8.12	* 8.12	* 9.20	* 9.20	* 11.22	9.37	* 9.76	6.02	7.73	4.37	5.95	3.40
-9	* 9.43	* 9.43	* 10.79	* 10.79	* 11.91	9.71	* 9.19	6.23	* 7.41	4.51	6.07	3.51
-10.5			* 12.68	* 12.68	* 10.53	10.18	* 8.23	6.54	* 6.67	4.75	* 5.47	3.71
-12					* 8.42	* 8.42	* 6.65	* 6.65	* 5.30	5.14		

10.0M 북 & 7.0M 암 & 800mm Shoe

DX300LC-5(-5K/-5L)

METRIC

1,000 kg

A (m) B (m)	10.5		12		13.5		15		MAX. REACH		
											A (m)
12									* 1.45	* 1.45	12.85
10.5					* 1.86	* 1.86			* 1.39	* 1.39	13.90
9					* 2.56	* 2.56			* 1.36	* 1.36	14.71
7.5			* 2.78	* 2.78	* 2.78	2.70	* 1.82	* 1.82	* 1.35	* 1.35	15.33
6			* 2.98	* 2.98	* 2.91	2.61	* 2.40	2.09	* 1.36	* 1.36	15.79
4.5	* 3.46	* 3.46	* 3.24	3.10	* 3.09	2.50	* 2.82	2.02	* 1.39	* 1.39	16.10
3	* 3.87	3.63	* 3.53	2.92	* 3.29	2.38	* 3.14	1.94	* 1.43	* 1.43	16.26
1.5	* 4.28	3.37	* 3.82	2.74	* 3.51	2.25	3.15	1.85	* 1.50	* 1.50	16.28
0	* 4.66	3.14	* 4.11	2.58	3.62	2.14	3.07	1.78	* 1.59	1.55	16.16
-1.5	* 5.00	2.96	4.17	2.44	3.52	2.04	3.01	1.72	* 1.72	1.56	15.90
-3	4.88	2.82	4.06	2.34	3.44	1.97	2.97	1.68	* 1.89	1.60	15.49
-4.5	4.80	2.75	4.00	2.29	3.41	1.94			* 2.12	1.69	14.91
-6	4.77	2.72	3.99	2.27	3.42	1.95			* 2.44	1.84	14.16
-7.5	4.81	2.76	4.03	2.32					* 2.95	2.07	13.18
-9	4.92	2.86							* 3.80	2.46	11.94
-10.5									* 4.52	3.13	10.35
-12									* 4.74	4.61	8.16