


4.0M 붐 & 1.9M 암 & Non Dozer


DX150LCR-7

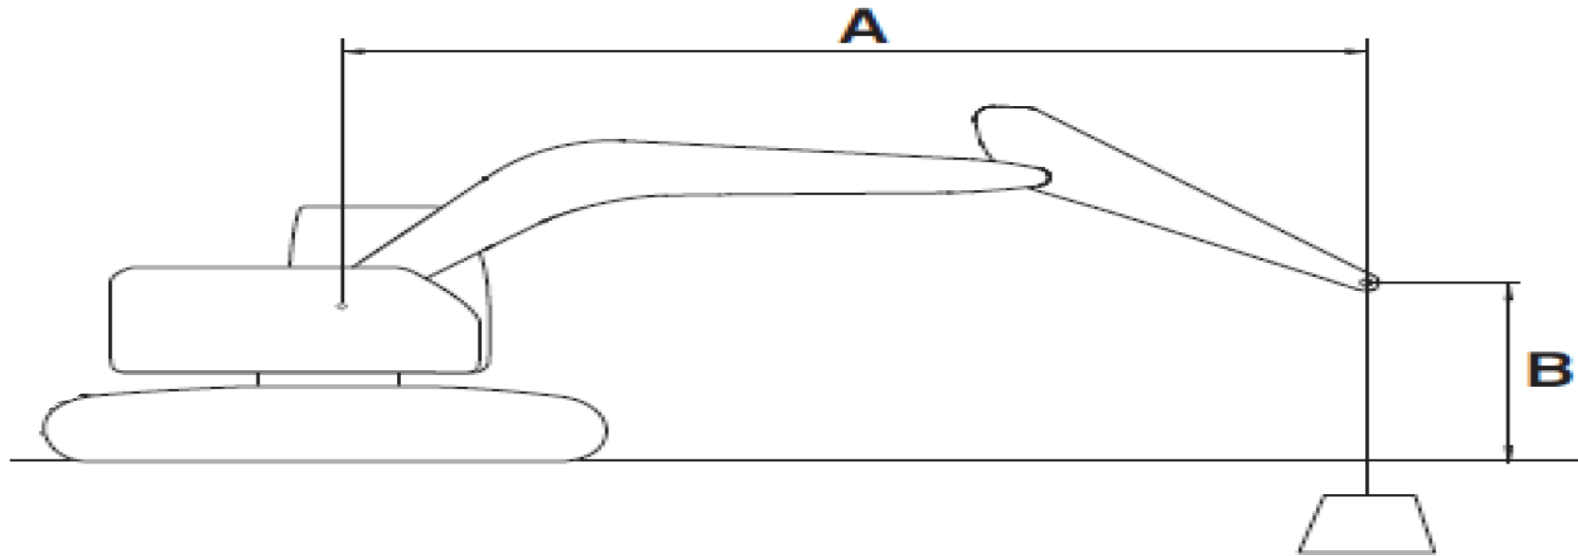

	F 1.5 m	S 1.5 m	F 3 m	S 3 m	F 4.5 m	S 4.5 m	Max. F	Max. S	Reach (m)
6 m			4.94 *	4.94 *			3.37 *	3.37 *	Max. at(m) 3.91
4.5 m			4.56 *	4.56 *	4.72 *	3.76	2.78 *	2.78 *	Max. at(m) 5.19
3 m			7.85 *	6.86	5.8	3.65	2.63 *	2.45	Max. at(m) 5.81
1.5 m					5.6	3.48	2.71 *	2.3	Max. at(m) 6.00
0 m			9.26 *	6.1	5.47	3.36	3.01 *	2.38	Max. at(m) 5.80
-1.5 m	6.34 *	6.34 *	10.34 *	6.1	5.45	3.35	3.76 *	2.81	Max. at(m) 5.15
-3 m			7.11 *	6.28			4.84 *	4.35	Max. at(m) 3.84

4.0M 붐 & 1.9M 암 & Dozer Up


DX150LCR-7

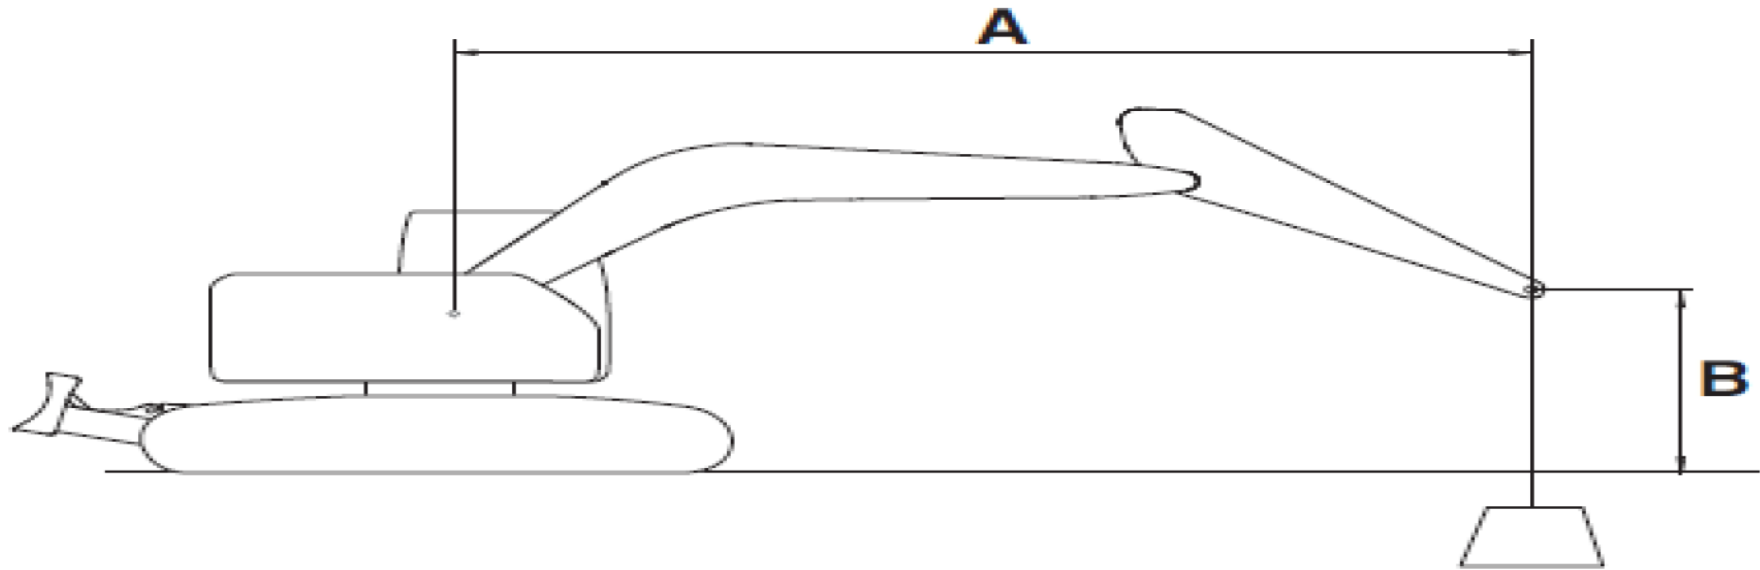

	F 1.5 m	S 1.5 m	F 3 m	S 3 m	F 4.5 m	S 4.5 m	Max. F	Max. S	Reach (m)
6 m			4.94 *	4.94 *			3.37 *	3.37 *	Max. at(m) 3.91
4.5 m			4.56 *	4.56 *	4.72 *	4.01	2.78 *	2.78 *	Max. at(m) 5.19
3 m			7.85 *	7.29	5.78	3.89	2.63 *	2.63	Max. at(m) 5.81
1.5 m					5.59	3.72	2.71 *	2.47	Max. at(m) 6.00
0 m			9.26 *	6.53	5.45	3.61	3.01 *	2.56	Max. at(m) 5.80
-1.5 m	6.34 *	6.34 *	10.34 *	6.54	5.44	3.59	3.76 *	3.01	Max. at(m) 5.15
-3 m			7.11 *	6.72			4.84 *	4.65	Max. at(m) 3.84

4.6M 붐 & 2.5M 암 & Dozer Up

DX150LCR-7

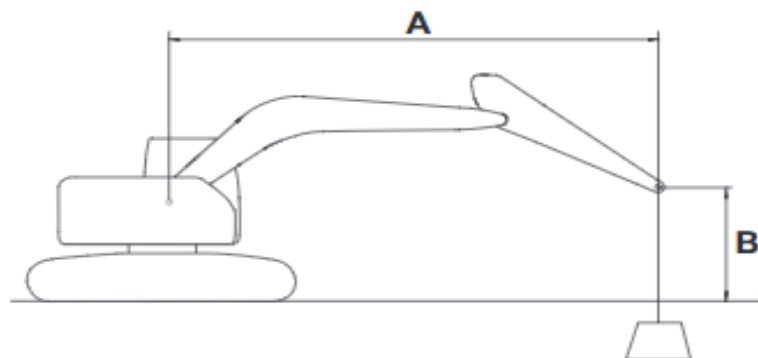













Track Width	: 2.59 m (8' 6")
Boom	: 4.6 m (15' 1")
Arm	: 2.5 m (8' 2")
Bucket	: Without Bucket
Counterweight	: 3,240 kg (7,143 lb)
Shoe	: 600 mm (24")
Dozer	: Dozer Up (Rear)
	: Rating Over Front
	: Rating Over Side or 360 degree
Unit	: 1,000 kg (1,000 lb)

그림 15

DS2102114


METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		MAX. REACH		A (m)
											
7.5			* 3.79	* 3.79					* 2.74	* 2.74	3.63
6					* 3.66	* 3.66			* 2.16	* 2.16	5.42
4.5			* 3.97	* 3.97	* 4.25	4.04	* 3.19	2.55	* 2.00	* 2.00	6.39
3			* 7.25	7.21	* 5.27	3.84	3.61	2.48	* 1.99	1.98	6.91
1.5			* 8.32	6.49	5.47	3.60	3.50	2.38	* 2.10	1.87	7.07
0			* 7.17	6.20	5.27	3.43	3.42	2.30	* 2.36	1.90	6.90
-1.5	* 5.41	* 5.41	* 10.36	6.18	5.20	3.37	3.39	2.28	* 2.89	2.11	6.36
-3	* 9.21	* 9.21	* 8.79	6.29	5.26	3.42			4.04	2.70	5.37

4.6M 붐 & 2.5M 암 & Dozer Down

DX150LCR-7

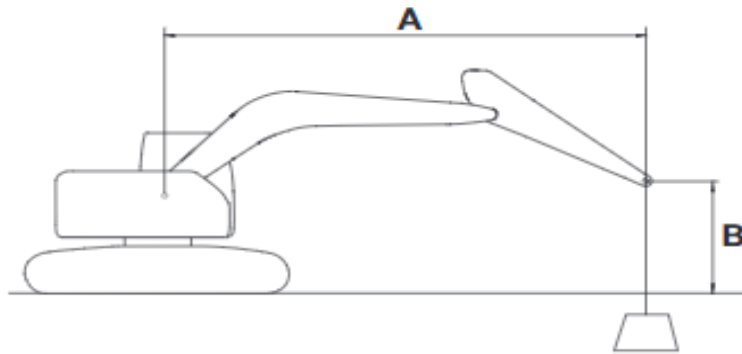










Track Width	: 2.59 m (8' 6")
Boom	: 4.6 m (15' 1")
Arm	: 2.5 m (8' 2")
Bucket	: Without Bucket
Counterweight	: 3,240 kg (7,143 lb)
Shoe	: 600 mm (24")
Dozer	: Dozer Down (Rear)
	: Rating Over Front
	: Rating Over Side or 360 degree
Unit	: 1,000 kg (1,000 lb)

그림 14

DS2102113

METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		MAX. REACH		
											A (m)
7.5			* 3.79	* 3.79					* 2.74	* 2.74	3.63
6					* 3.66	* 3.66			* 2.16	* 2.16	5.42
4.5			* 3.97	* 3.97	* 4.25	* 4.25	* 3.19	* 3.19	* 2.00	* 2.00	6.39
3			* 7.25	* 7.25	* 5.27	4.96	* 4.43	3.18	* 1.99	* 1.99	6.91
1.5			* 8.32	* 8.32	* 6.37	4.70	* 4.93	3.08	* 2.10	* 2.10	7.07
0			* 7.17	* 7.17	* 7.06	4.52	* 5.22	2.99	* 2.36	* 2.36	6.90
-1.5	* 5.41	* 5.41	* 10.36	8.61	* 7.02	4.46	* 5.05	2.97	* 2.89	2.75	6.36
-3	* 9.21	* 9.21	* 8.79	8.74	* 6.00	4.51			* 4.20	3.52	5.37